


REV.	ECN. NO.	APPD.
A	WL-21-006	Jerry zhang

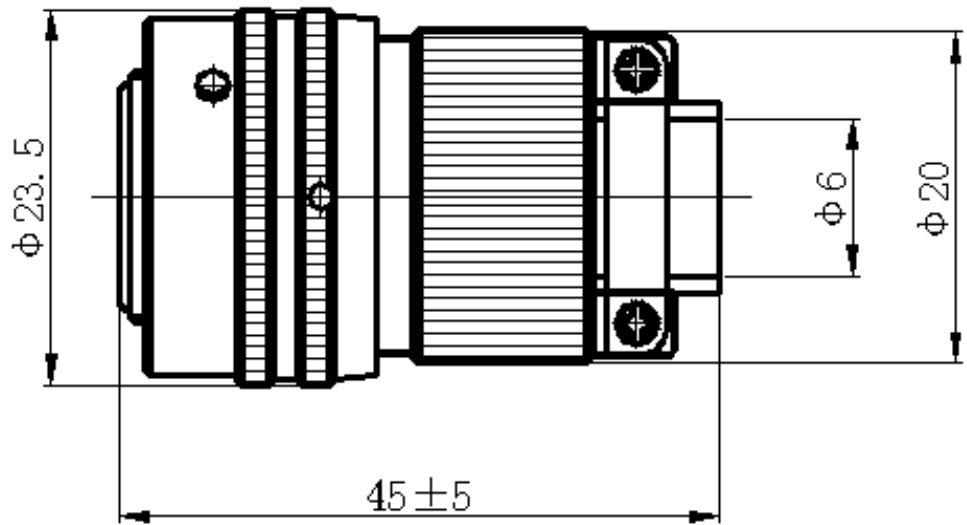

Technical Specifications:

Operating temperature: -55°C - +125°C
Relative humidity: 90%-95% at 40°C ±2°C
Operating pressure: 101.3 kPa - 1.33 Pa
Vibration: frequency 10-2000 Hz, acceleration 196 m/s²
Shock: acceleration 980.7 m/s²
Mechanical life: 500 cycles
Housing material: High-strength aluminum alloy
Contact parts: φ1 * 6
Contact resistance: φ1 ≤ 5 mΩ
Contact current: φ1 — 5A
Gas tightness: not greater than 4.6 * 10² Pa·cm/s²
Dielectric strength: 1500V at normal temperature

x.±	x.*±	UNITS	NAME(INTENDED USE)	
.x± 0.8	.x*±	mm	6-pin plug (hole type)	
.xx± 0.50	.xx*±	MAT'L	PART NO.(INTENDED USE)	CLASS:
.xxx±	.xxx*±	SEE NOTES		☐ CONFIDENTIAL ☐ SECRET ☒ GENERAL
		FINISH	WLES25-9501	TITLE: CONN DRAWING
		Q'TY	APPD: Yuan. wu 03/14'21	DWG NO.: WLES25-9501-0176
			CHKD: Lei. wang 03/15'21	
			DRAW: Min. sun 03/16'21	
				SCALE
				SHEET
				REV.
				N/A
				1/1
				A